



Cavity Release



Cowdroy Springstop is the new and unique way of opening a Cavity Door! If you have a Cavity Slider Door pull you will be wondering why someone didn't invent the Cowdroy Springstop years ago.

All you do is simply push and the door closes. The patent pending technology allows the Cowdroy Springstop to work within the Cavity so you just 'push and go'.

- Easy to fit
- Long life in service
- No maintenance
- Flush fitting
- Cost effective
- New or existing doors



Springstop



A new and revolutionary way of closing Cavity Doors quickly and easily.

Installing a Cowdroy Springstop on your Cavity Sliding Doors is simple, quick and easy, taking less than two minutes. All you need is a drill and a screwdriver, no routing, no chiselling, no mess, no fuss!


The Cowdroy Springstop prevents Cavity Doors slamming as its spring loaded action acts as a shock absorber stopping the door from jarring and preventing damage.

Cowdroy Springstop is the product of good old fashioned Kiwi ingenuity. Conceived, developed, designed and assembled in New Zealand.




Available from:



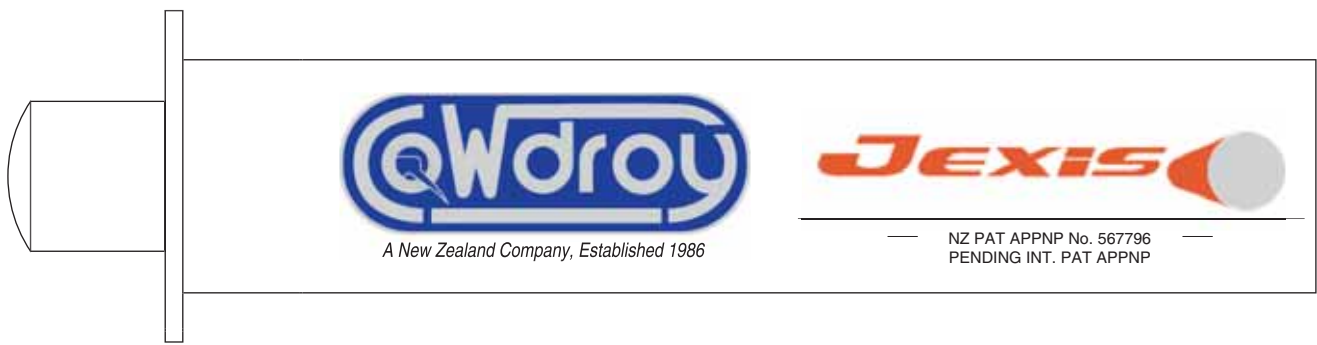

The Cavity Release mechanism is simple and natural to use. When the door is shut away in the pocket it needs to be left with the release mechanisms spring in a loaded position. This is achieved by depressing the door an extra 10mm into the cavity pocket. The door will then click back leaving the front door edge flush with the opening door jambs. The Cavity Release mechanism is now loaded and ready for release. The next time the operator wants to eject the door out of the pocket they depress the door 10mm back into the pocket and this will release the tension in the spring mechanism. The door is propelled out of the pocket completing the cycle of the Cavity Release mechanism and leaving the flush pulls accessible for use.

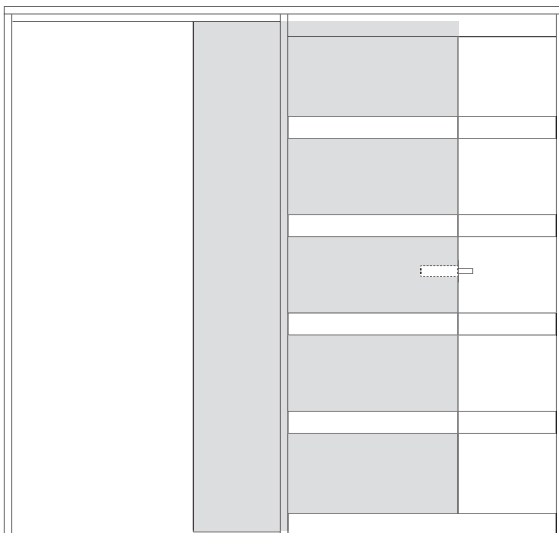

Fitting Instructions

With the back edge of the door facing you measure and find centre.

Eg. 1980 High = 990.

38mm thick door = 19mm.

Mark the door. Using a 25mm speed bore bit drill a hole to the depth of 140mm. Place spring stop in the drilled hole and secure with the two screws supplied. Now your door is ready to be fitted.

New Zealand

18 Kerwyn Ave, East Tamaki, Auckland
 P.O. Box 58086, Greenmount, Auckland 2141
 Email: sales@cowdroy.co.nz
 Phone: (09) 274 7279 or (09) 274 3777
 Fax: (09) 274 4453

New Zealand

Unit B, 13 Parkhouse Rd,
 Sockburn, Christchurch 8042
 Email: chch@cowdroy.co.nz
 Phone: (03) 943 2060
 Fax: (03) 943 2061

Australia

48 Justin St
 Smithfield, 2164
 New South Wales - Sydney
 Phone: (61 29) 604 3000
 Fax: (61 29) 609 3694