



Spacesaver Cavity Slider





The Advantages of Installing Cowdroy Cavity Slider.


- * The product has been designed to give you more space to live.
- * Cowdroy Cavity Slider comes to you fully assembled. It saves time and makes installation effortless.
- * The doors do not have to be grooved for guides. Guides are fixed to the face of the jambs or a standard T guide can be fitted if required.
- * Complete Aluminium Frame for strength and durability.
- * Cowdroy's Triumph Sliding Door Track Systems allows for a maximum load of 68 kg per door.
- * The door is available for 70mm, 90mm, 94mm wall thickness or other stud sizes on request.
- * The mitre finish to grooved jamb is standard.
- * Other jambs include Cowdroy Ultimate Aluminium Jamb in a different range of colours eg. Anodised or powder coat.
- * Door panel can be left protruding for disabled access.

Spacesaver Cavity Slider

Functional Planning

When you plan your doorways, consider these three influencing factors:

1. The types of doors available, i.e. hinged, conventional sliding etc.
 2. The types of adjoining rooms, i.e. dining room/kitchen, bedroom/hall, etc.
 3. The layout and size of the room.
- Now look at the illustrations and see the obvious advantages of installing a Cowdroy Cavity Slider unit.

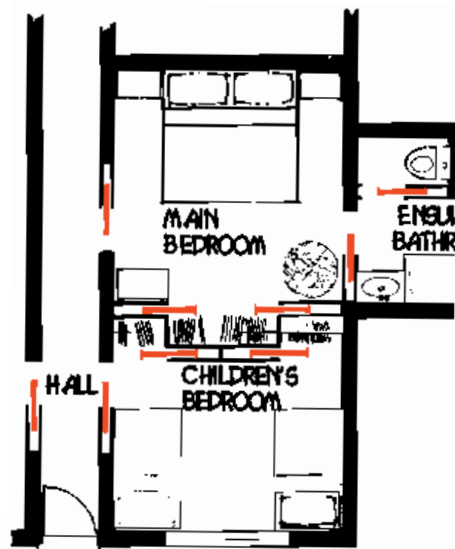

This bedroom layout shows where the Cowdroy Cavity Slider unit can be employed to obtain maximum available floor and wall space. Note the compact ensuite/bathroom layout which would not be possible using conventional doors.

Functional planning is achieved in the second bedroom by intelligent use of the Cowdroy Cavity Slider unit for the entrance and wardrobe doors.

The wall in the hall and the bedrooms are uncluttered allowing wall decorations such as family photographs and furniture to be placed right up to the door openings.

Planning a kitchen is always a challenge. A Cowdroy Cavity Slider unit allows much greater freedom in the positioning of units and appliances.

As homes become more compact with the rising cost of land, your living space becomes more valuable every day. Make use of it with Cowdroy Cavity Slider units.

Specifications

Extruded Aluminium Frame.
 Grooved or Flat jambs: Pine or Rimu
 Other types available on application.
 Removable head jambs for easy access and adjustment.
 Tracking System: Extruded Aluminium Cowdroy "Triumph System".
 Rollers: Double Bogey for reliability.
 Nylon tyred wheels with lubricated steel ball bearings smooth & quiet operation.
 68 Kg load per door.

Trim Size:
 Single: Door width x 2 + 30mm. Double: Door width x 4 + 10mm.
 Height: Door + 80mm. Height: Door + 80mm.

Available ex: 70mm, 90mm and 94mm stud.
 Other door and stud sizes available on request.



18 Kerwyn Ave, East Tamaki, Auckland
 P.O. Box 58086, Greenmount, Auckland
 Email: sales@cowdroy.co.nz
 Phone: (09) 274 7279 or (09) 274 3777
 Fax 09 274 4453

Unit B, 13 Parkhouse Rd, Sockburn, Christchurch
 Email: chch@cowdroy.co.nz
 Phone: (03) 943 2060
 Fax: (03) 943 2061